


ALL TERRAIN VEHICLE (ATV) POLARIS

Think Outside



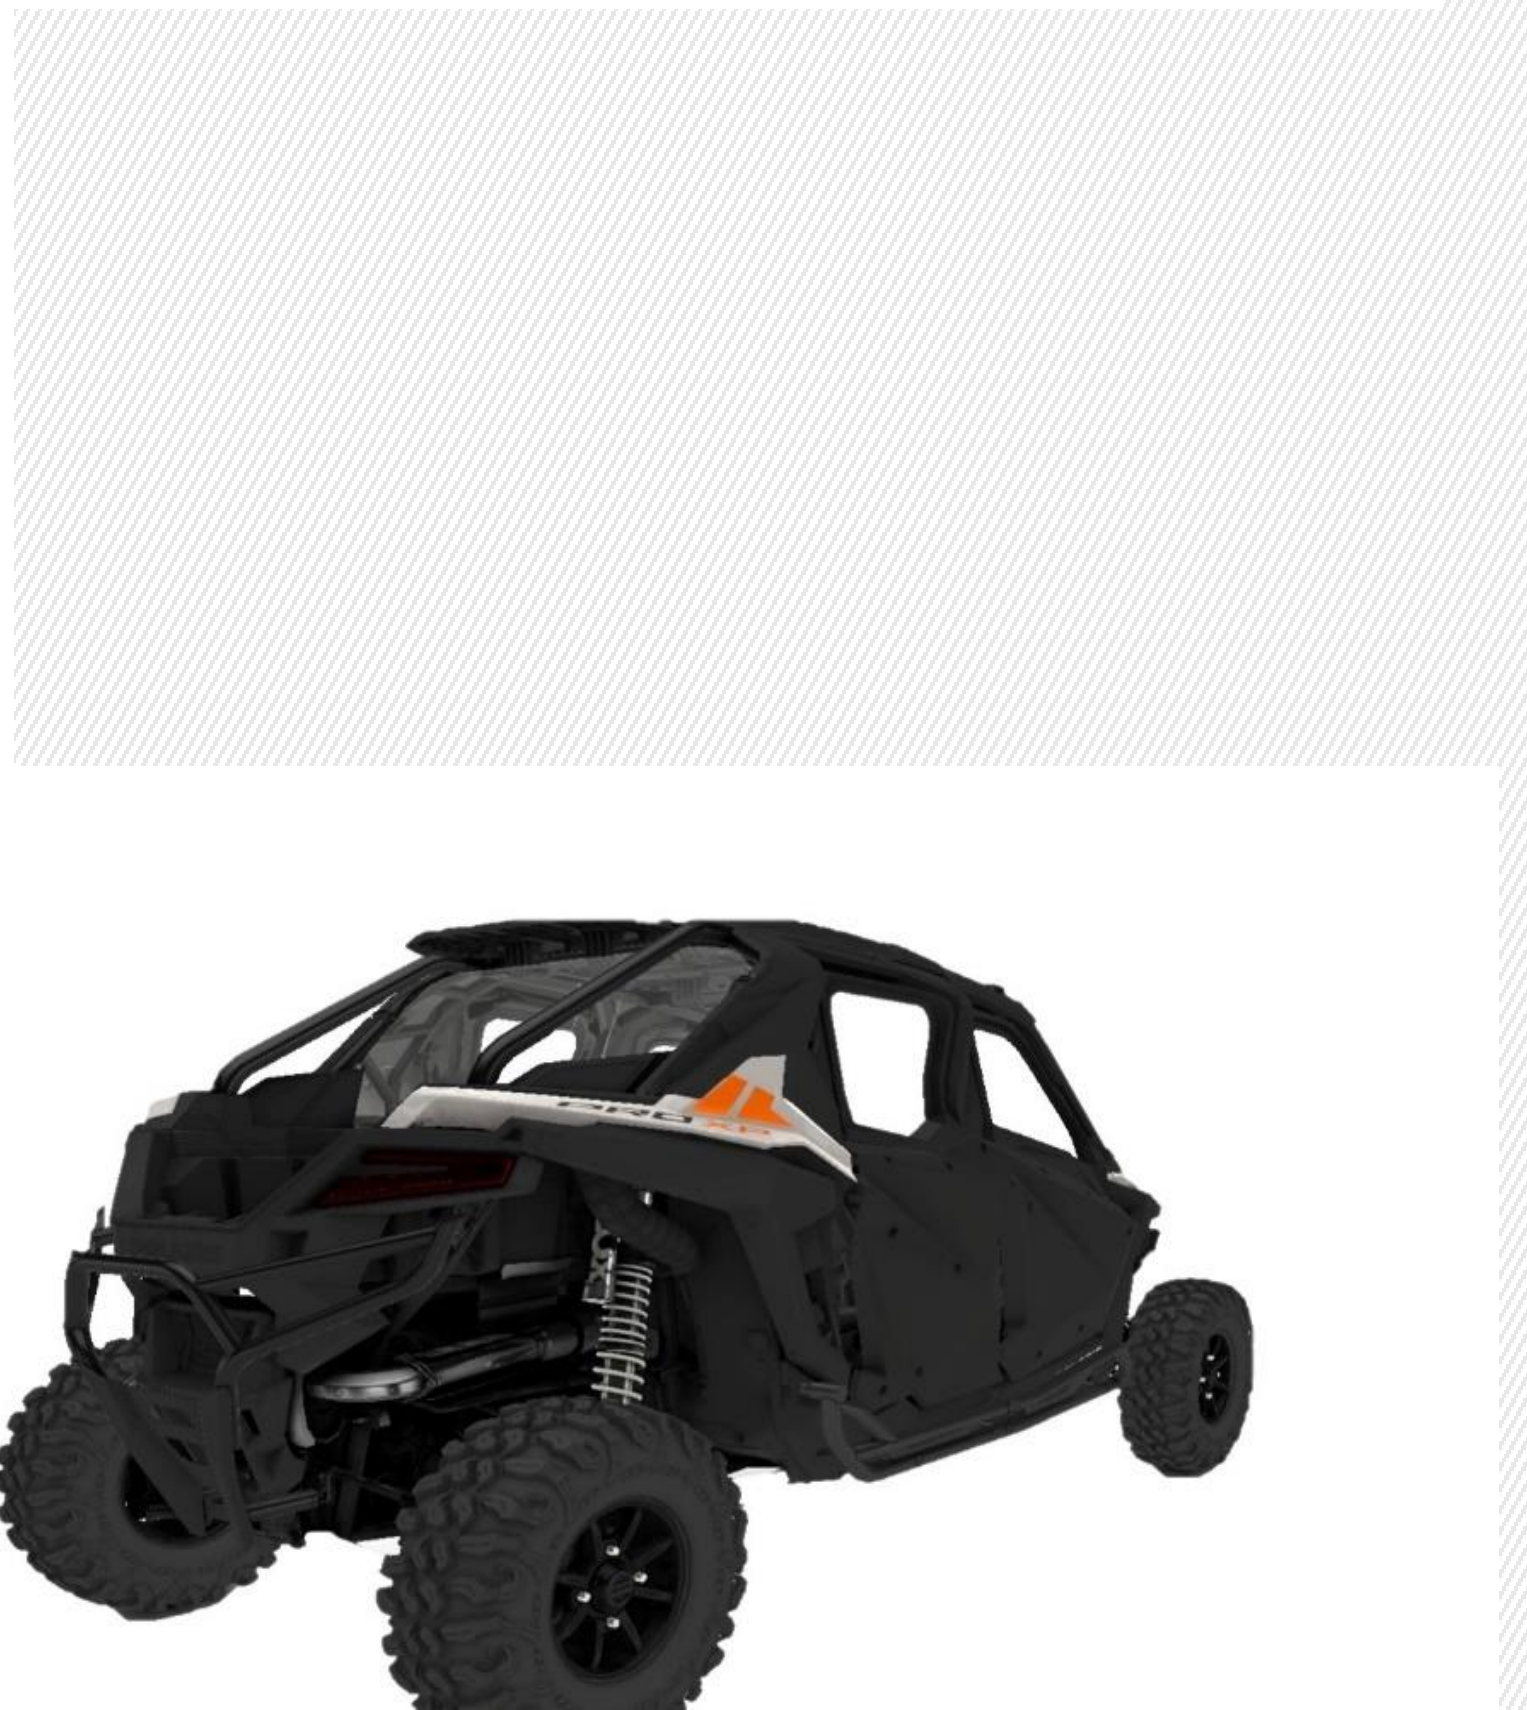

Key Specifications

181	64"	14.5"
HP	WIDTH	GROUND CLEARANCE

Cooling	Liquid
Cylinders Displacement	925cc
Drive System Type	Isolated Xtreme Performance True On-Demand AWD/2WD

Bed Box Dimensions (L x W x H)	26 x 17.7 x 11.5 in (66 x 45 x 29.2 cm)
Box Capacity	333 kg
Estimated Dry Weight	2,020 LBS (916 KG)
Fuel Capacity	13 gal (49.2 L)
Ground Clearance	14.5 in (36.8 cm)
Hitch Towing Rating	650 kg
Overall Vehicle Size (L x W x H)	155 x 64 x 73.6 in (393.7 x 162.6 x 186.9 cm)
Payload Capacity	603 kg
Wheelbase	125 in (317.5 cm)

Brakes

Front/Rear Brakes	4-Wheel Hydraulic Disc Rear Calipers	with Dual-Bore Front and Dual-Bore Calipers
Parking Brake	Park in Transmission	

Additional Specifications

Cargo System	Lock & Ride®
Doors	Front & Rear Full Doors
Electronic Power Steering	High Assist Electronic Power Steering with Quick Turn Rack;state of art Steering Wheel
Hitch Type	Available
Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, Front and Rear DC Outlet
Lighting	Signature White LED, Low/High & Red LED Tail / Brake Lights
Other Standard Features	High Output 900w charging system with sealed electrical, Polaris Pulse system, In-Dash Charge Port, Polaris P.A.S.S.
Seat Type	Bolstered Bucket Seats with 4-way adjustability and 4-Pt Height Adjustable Seat Belts

Tires / Wheels Suspension

Front Tires	30 x 10-14 Maxxis Carnivore II; (8-ply rated); Wheel Size 14x6
Rear Tires	30 x 10-14 Maxxis Carnivore II; (8-ply rated); Wheel Size 14x7
Wheels	Cast Aluminum

Suspension

Suspension System	Independent System
Front Shocks	2" FOX Shocks with Position Sensitive Spiral Technology and QS3 compression adjusters
Front Suspension	High-Clearance Dual A-Arm with Stabilizer Bar and 20 in (50.8 cm) Usable Travel*, 17 in (43.2 cm) Wheel Travel
Rear Shocks	2.5" FOX Shocks with Position Sensitive Spiral Technology and QS3 compression adjusters
Rear Suspension	Trailing Arm & Standard-Clearance Radius Rods with Stabilizer Bar and 22 in (55.9 cm) Usable Travel*, 20 in (50.8 cm) Wheel Travel

Accessories

Overhead Canopy

Spare Tyre

Jack

Shovel, Pick Axe, Fire Axe, Fire Extinguisher

Jerrican HDPE 25 Ltr with holder

Colour Code illuminating flag staff

Camo Net & Rock

12 DC socket

Rack for communication equipment

USB Port

Fog lite

Battery

Tyre holder

Towing hook

Wind Shield Front & Rear

Horn

Indicator

Side Mirror

Rear Mirror

Side Doors

Rock sliders

Front & Rear brush guard

Adjustable Reading Lamp

Indiapolaris.com

**Corporate Office: Polaris India Private Limited
Unit No. G-10, Ground Floor, SSR Corporate Park,
13/6 Mathura Road, NH-2 Faridabad, 121003**

Landline: 0129-2256161-63

Email: Polaris.india@polaris.com

Website: Polaris.com

Polaris India Pvt. Ltd.